
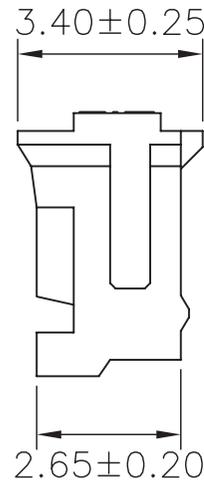
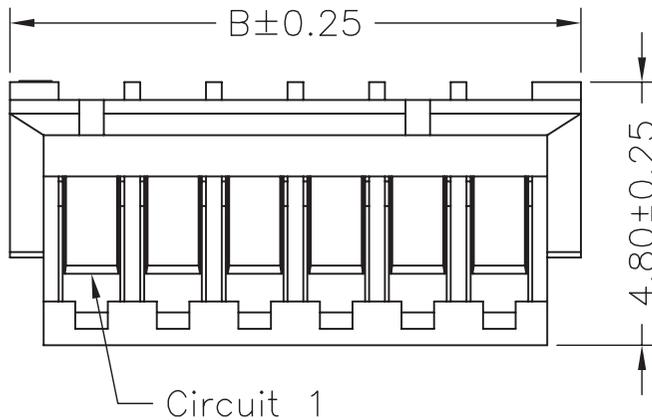
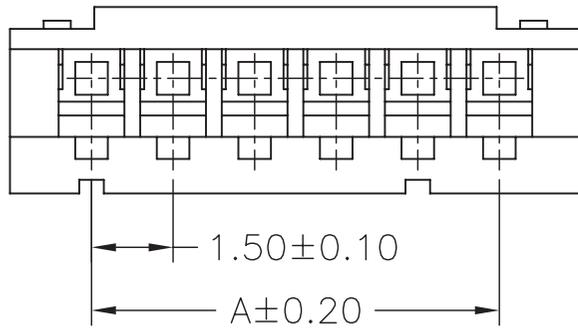


**SPECIFICATIONS**




Current Rating: 1A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Material: Nylon 66,UL94V-0  
 Color: Natural(White)

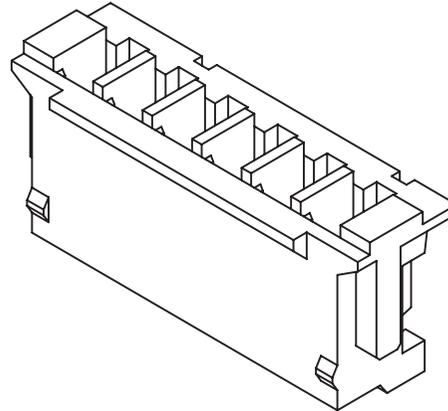


**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
A1500H-02P	1.50	4.50
A1500H-03P	3.00	6.00
A1500H-04P	4.50	7.50
A1500H-05P	6.00	9.00
A1500H-06P	7.50	10.50
A1500H-07P	9.00	12.00
A1500H-08P	10.50	13.50
A1500H-09P	12.00	15.00
A1500H-10P	13.50	16.50
A1500H-11P	15.00	18.00
A1500H-12P	16.50	19.50
A1500H-13P	18.00	21.00

<b>广瑞电子科技有限公司</b>			
UNIT	SCALE	SHEET	TITLE:
mm		1 of 1	<b>1.50mm PITCH HOUSING</b>
DRAWN BY	APPROVED BY		
SUSAN	HENLY		
2001.02.01	2001.02.01		
GENERAL TOLERANCE			
	X.X±0.25	ANGLE±	
B0	NEW RELEASE	2006.07.07	DRAW NO. :
REV.	DESCRIPTION	DATE	A1500H-XP
			REV. B0

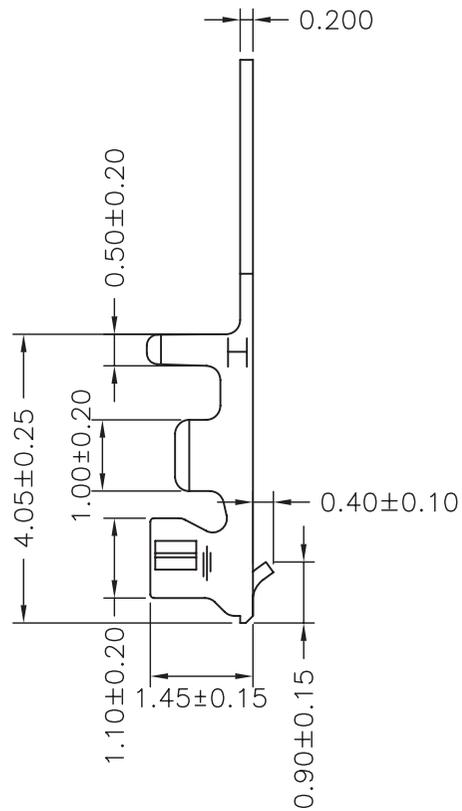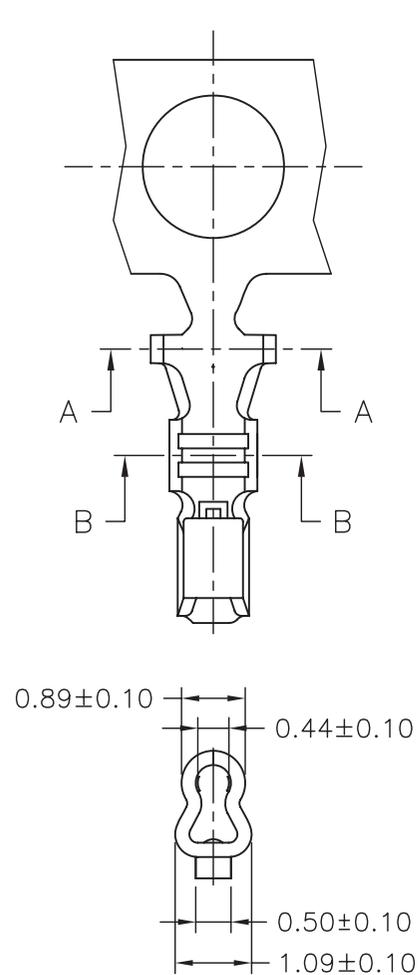

SEC:A-A



SEC:B-B


Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1500-TPE	AWG#26-#32	1.10mm(max)	Phosphor Bronze	Tin-plated	15,000pcs
A1500-GPE	AWG#26-#32	1.10mm(max)	Phosphor Bronze	Gold-flash	15,000pcs

Note:E-Stamping before Tin-plated or Gold-flash.

广瑞电子科技有限公司

UNIT	SCALE	SHEET	TITLE:
mm		1 of 1	1.50mm PITCH CRIMP TERMINAL
DRAWN BY	APPROVED BY		
SUSAN	HENLY		
2001.02.01	2001.02.01		
GENERAL TOLERANCE			
X. X±0.25	ANGLE±		
X. XX±0.15	▽		
X. XXX±0.05	⊕		
B0	NEW RELEASE	2006.07.07	DRAW NO. : A1500-XX
REV.	DESCRIPTION	DATE	REV. B0


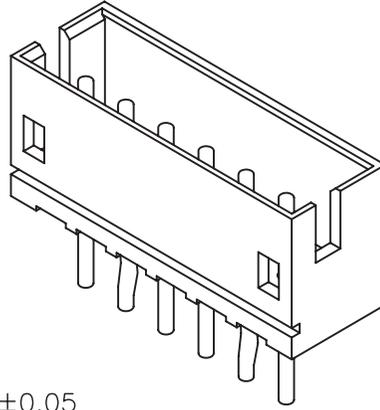


**SPECIFICATIONS**



Current Rating: 1A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Pin Material: Brass/Tin-plated  
 Material: Nylon 66,UL94V-0  
 Pantone Color: 7528C

**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
A1500WV-02P	1.50	4.50
A1500WV-03P	3.00	6.00
A1500WV-04P	4.50	7.50
A1500WV-05P	6.00	9.00
A1500WV-06P	7.50	10.50
A1500WV-07P	9.00	12.00
A1500WV-08P	10.50	13.50
A1500WV-09P	12.00	15.00
A1500WV-10P	13.50	16.50
A1500WV-11P	15.00	18.00
A1500WV-12P	16.50	19.50
A1500WV-13P	18.00	21.00

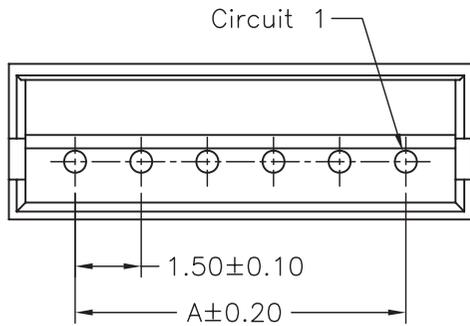


P.C.B LAYOUT

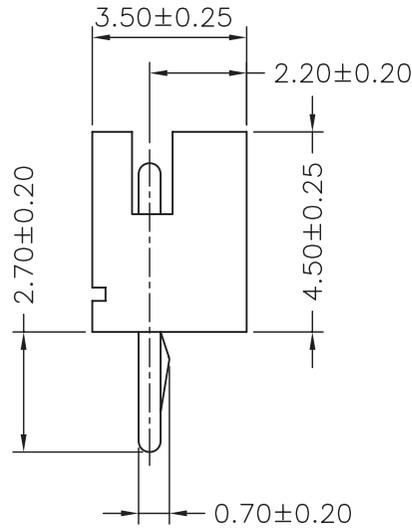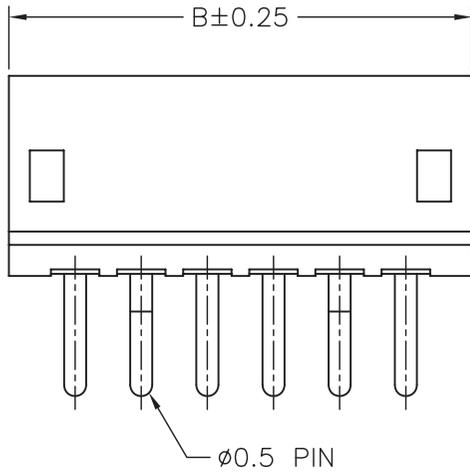

**广瑞电子科技有限公司**

			UNIT	SCALE	SHEET	TITLE:
			mm		1 of 1	
			DRAWN BY	APPROVED BY		1.50mm PITCH 180° WAFER
			陈敬全	SUSAN		
			2001.02.01	2001.02.01		
			GENERAL TOLERANCE			
			X. X±0.25	ANGLE±		
BO	NEW RELEASE	2006.07.07	X. XX±0.15	▷ ⊙		DRAW NO. :
REV.	DESCRIPTION	DATE	X. XXX±0.05			A1500WV-XP
						REV. BO


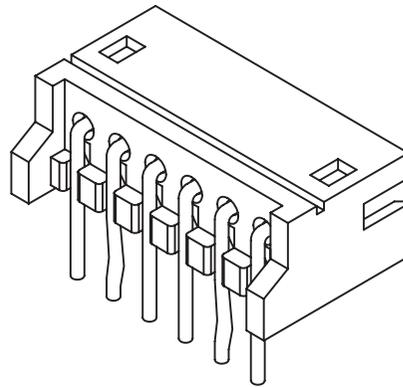


### SPECIFICATIONS



Current Rating: 1A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Pin Material: Brass/Tin-plated  
 Material: Nylon 66,UL94V-0  
 Pantone Color: 7528C

### Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A1500WR-02P	1.50	4.50
A1500WR-03P	3.00	6.00
A1500WR-04P	4.50	7.50
A1500WR-05P	6.00	9.00
A1500WR-06P	7.50	10.50
A1500WR-07P	9.00	12.00
A1500WR-08P	10.50	13.50
A1500WR-09P	12.00	15.00
A1500WR-10P	13.50	16.50
A1500WR-11P	15.00	18.00
A1500WR-12P	16.50	19.50
A1500WR-13P	18.00	21.00

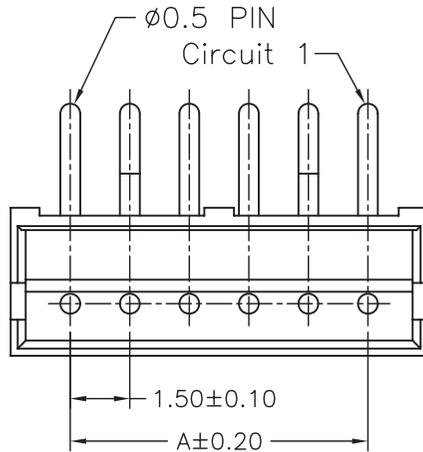


P.C.B LAYOUT




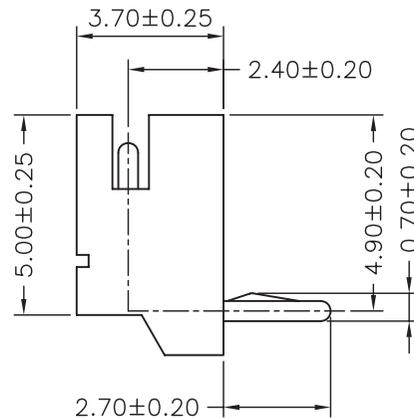
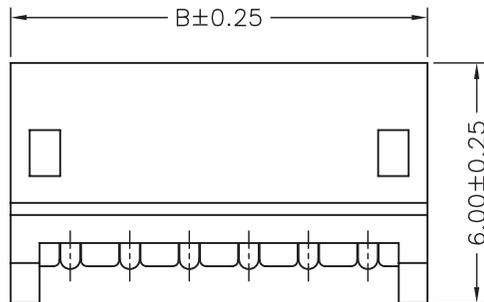


### 广瑞电子科技有限公司

			UNIT	SCALE	SHEET	TITLE:
			mm		1 of 1	
			DRAWN BY	APPROVED BY		1.50mm PITCH 90° WAFER
			陈敬全	SUSAN		
			2001.02.01	2001.02.01		
			GENERAL TOLERANCE			
			X.X±0.25	ANGLE±		
			X.XX±0.15	⊕		
			X.XXX±0.05	⊙		
BO	NEW RELEASE	2006.07.07				DRAW NO.:
REV.	DESCRIPTION	DATE				A1500WR-XP
						REV. BO



**SPECIFICATIONS**  
 Current Rating: 1A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Pin Material: Brass/Tin-plated  
 Solder Tabs: Brass/Tin-plated  
 Wafer: Nylon 6T,UL94V-0  
 Cap: Nylon 6T,UL94V-0,Natural(Beige)  
 Color: Natural(Beige)

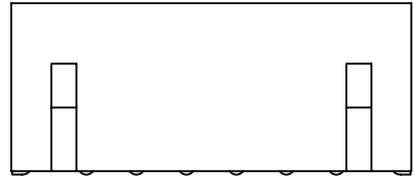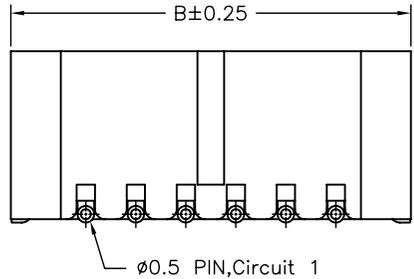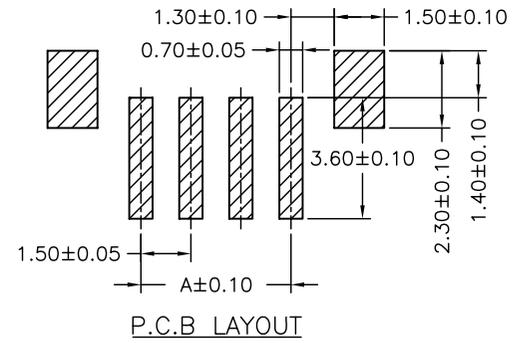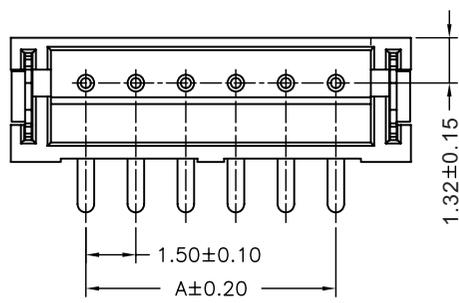


**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
A1500WV-S-02P	1.50	6.00
A1500WV-S-03P	3.00	7.50
A1500WV-S-04P	4.50	9.00
A1500WV-S-05P	6.00	10.50
A1500WV-S-06P	7.50	12.00
A1500WV-S-07P	9.00	13.50
A1500WV-S-08P	10.50	15.00
A1500WV-S-09P	12.00	16.50
A1500WV-S-10P	13.50	18.00
A1500WV-S-11P	15.00	19.50
A1500WV-S-12P	16.50	21.00
A1500WV-S-13P	18.00	22.50

<b>广瑞电子科技有限公司</b>				
UNIT	SCALE	SHEET	TITLE:	
mm		1 of 3		
DRAWN BY	APPROVED BY			
SUSAN	HENLY			
2002.09.10	2002.09.10			
GENERAL TOLERANCE				
ANGLE±				
B0	NEW RELEASE	2006.07.07	X.X±0.25	
REV.	DESCRIPTION	DATE	X.XX±0.15 X.XXX±0.05	
			DRAW NO. : A1500WV-S-XP	
			REV. B0	

**1.50mm PITCH  
180° WAFER-SMT TYPE**




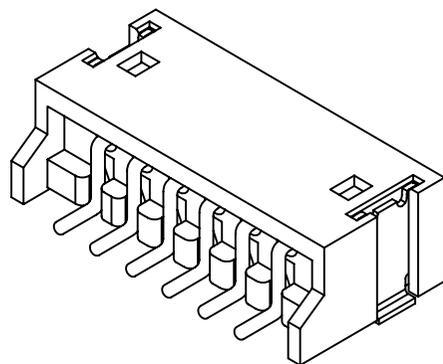


**SPECIFICATIONS**

Current Rating: 1A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Pin Material: Brass/Tin-plated  
 Solder Tabs: Brass/Tin-plated  
 Material: Nylon 6T,UL94V-0  
 Color: Natural(Beige)

**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
A1500WR-S-02P	1.50	6.00
A1500WR-S-03P	3.00	7.50
A1500WR-S-04P	4.50	9.00
A1500WR-S-05P	6.00	10.50
A1500WR-S-06P	7.50	12.00
A1500WR-S-07P	9.00	13.50
A1500WR-S-08P	10.50	15.00
A1500WR-S-09P	12.00	16.50
A1500WR-S-10P	13.50	18.00
A1500WR-S-11P	15.00	19.50
A1500WR-S-12P	16.50	21.00
A1500WR-S-13P	18.00	22.50

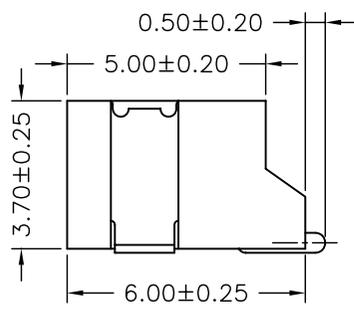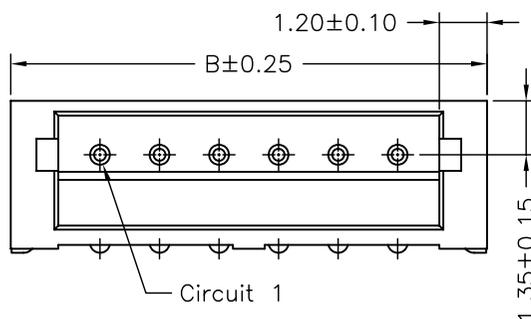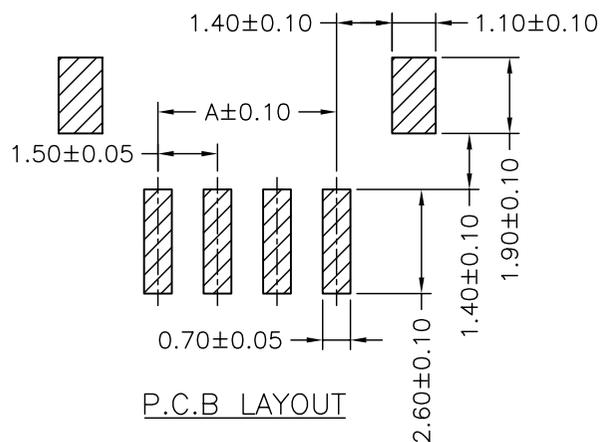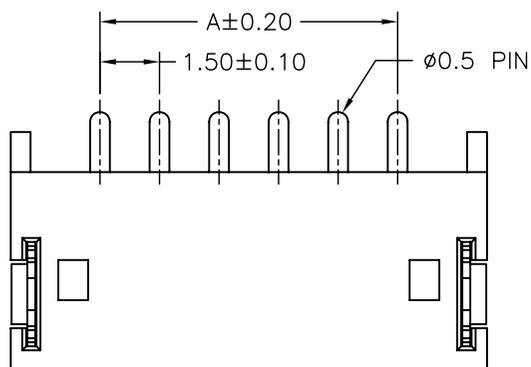

**广瑞电子科技有限公司**

UNIT	SCALE	SHEET
mm		1 of 2
DRAWN BY	APPROVED BY	
SUSAN	HENLY	
2002.09.10	2002.09.10	
GENERAL TOLERANCE		
X.X±0.25	ANGLE±	
X.XX±0.15	⚠	
X.XXX±0.05		

TITLE:	1.50mm PITCH 90° WAFER-SMT TYPE
DRAW NO. :	
REV.	BO
DESCRIPTION	A1500WR-S-XP
DATE	