






SPECIFICATIONS

Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
B3965HV-F-2P	3.96	8.96
B3965HV-F-3P	7.92	12.92
B3965HV-F-4P	11.88	16.88
B3965HV-F-5P	15.84	20.84
B3965HV-F-6P	19.80	24.80
B3965HV-F-7P	23.76	28.76
B3965HV-F-8P	27.72	32.72
B3965HV-F-9P	31.68	36.68
B3965HV-F-10P	35.64	40.64
B3965HV-F-11P	39.60	44.60
B3965HV-F-12P	43.56	48.56
B3965HV-F-13P	47.52	52.52
B3965HV-F-14P	51.48	56.48
B3965HV-F-15P	55.44	60.44

广瑞电子科技有限公司					
UNIT	SCALE	SHEET	TITLE:		
mm		1 of 1	3.96mm PITCH 180° HOUSING, WITH POLARIZING BOSS		
DRAWN BY		APPROVED BY			
SUSAN		HENLY			
2003.09.02		2003.09.02			
GENERAL TOLERANCE					
	X. X±0.25	ANGLE±		DRAW NO. : B3965HV-F-XP	
B0	NEW RELEASE	2005.12.06	X. XX±0.15		
REV.	DESCRIPTION	DATE	X. XXX±0.05		
				REV. B0	

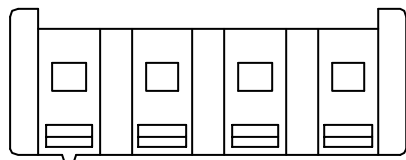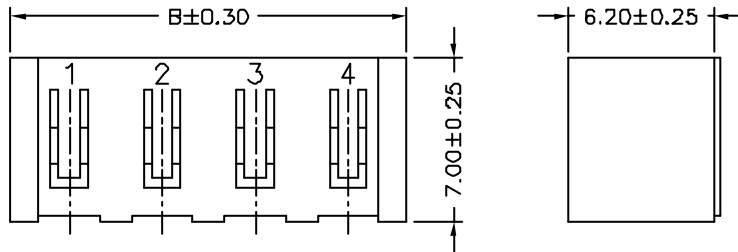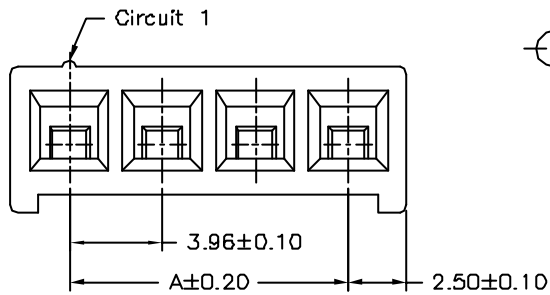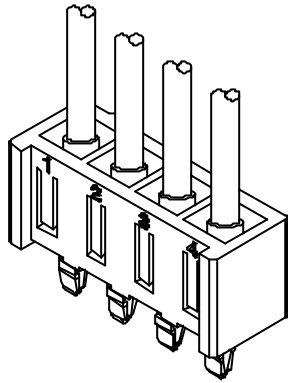

SPECIFICATIONS



Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
B3965HV-02P	3.96	8.96
B3965HV-03P	7.92	12.92
B3965HV-04P	11.88	16.88
B3965HV-05P	15.84	20.84
B3965HV-06P	19.80	24.80
B3965HV-07P	23.76	28.76
B3965HV-08P	27.72	32.72
B3965HV-09P	31.68	36.68
B3965HV-10P	35.64	40.64
B3965HV-11P	39.60	44.60
B3965HV-12P	43.56	48.56
B3965HV-13P	47.52	52.52
B3965HV-14P	51.48	56.48
B3965HV-15P	55.44	60.44

广瑞电子科技有限公司

			UNIT	SCALE	SHEET	TITLE:
			mm		1 of 1	3.96mm PITCH 180° HOUSING, WITHOUT POLARIZING BOSS
			DRAWN BY	APPROVED BY		
			GENERAL TOLERANCE			DRAW NO.: B3965HV-XP
B1	REVISE	2006.08.08	X.X ₁ ±0.25	ANGLE;∠		
B0	NEW RELEASE	2005.12.06	X.XX;∠0.15			
REV.	DESCRIPTION	DATE	X.XXX;∠0.05		REV. B1	

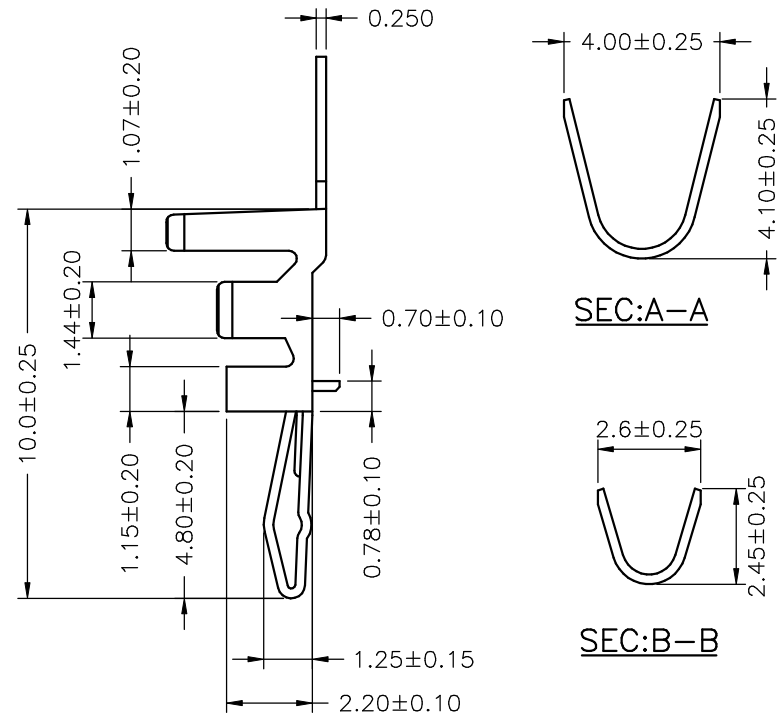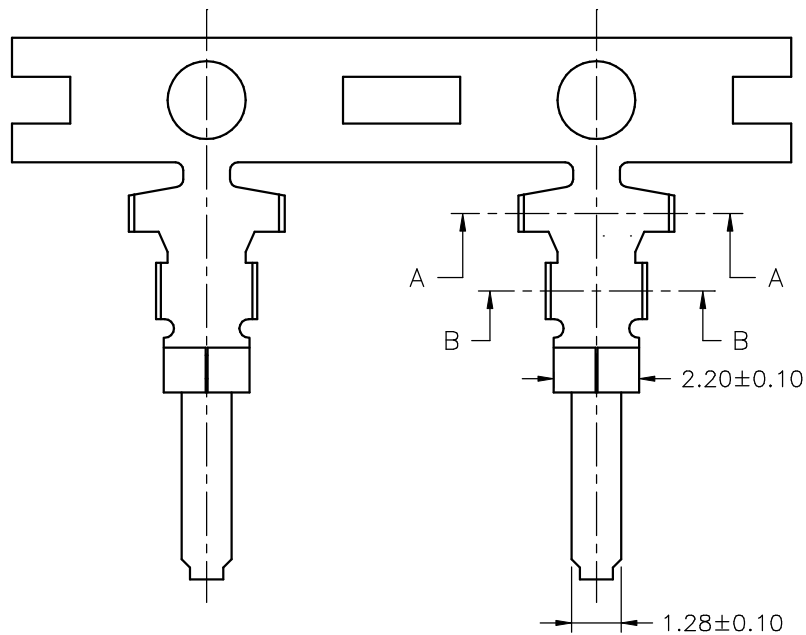

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
B3965V-TPe	AWG#18-#22	3.00mm(max)	Phosphor Bronze	Tin-plated	5,000pcs

Note:e-Stamping before Tin-plated

广瑞电子科技有限公司					
UNIT	SCALE	SHEET	TITLE:		
mm		1 of 1			
DRAWN BY	APPROVED BY		3.96mm PITCH 180° CRIMP TERMINAL		
SUSAN	HENLY				
2003.10.06	2003.10.06		DRAW NO. : B3965V-XX		
GENERAL TOLERANCE			REV. B0		
X. X±0.25	ANGLE±				
X. XX±0.15	▽				
X. XXX±0.05	⊕				
B0	NEW RELEASE	2005.12.06			
REV.	DESCRIPTION	DATE			